

9.15 Flight Manual Supplement-MK 21 Burner, Butane Fuel


9.15.1 General Information


This supplement details the instructions and limitations necessary to ensure the safe operation, maintenance and continued airworthiness of the Ultramagic MK 21 Burner when configured for use with liquid butane fuel.

When specified for use with butane fuel, the burner is supplied with a different jet configuration to the standard configuration when used with propane. In addition, the jet configuration depends upon the method adopted to increase the fuel cylinder pressure.

The cylinder fuel pressure may be increased either by heating the cylinder using an electrically powered heating jacket (contact Ultramagic for details) or by the use of nitrogen, injected directly in to the cylinder. When nitrogen is used, the cylinder is considered to be nitrogen pressurised.

When configured for use with butane fuel, the burner is identified by the word "BUTANE" engraved on the handle post adjacent to the burner handle.

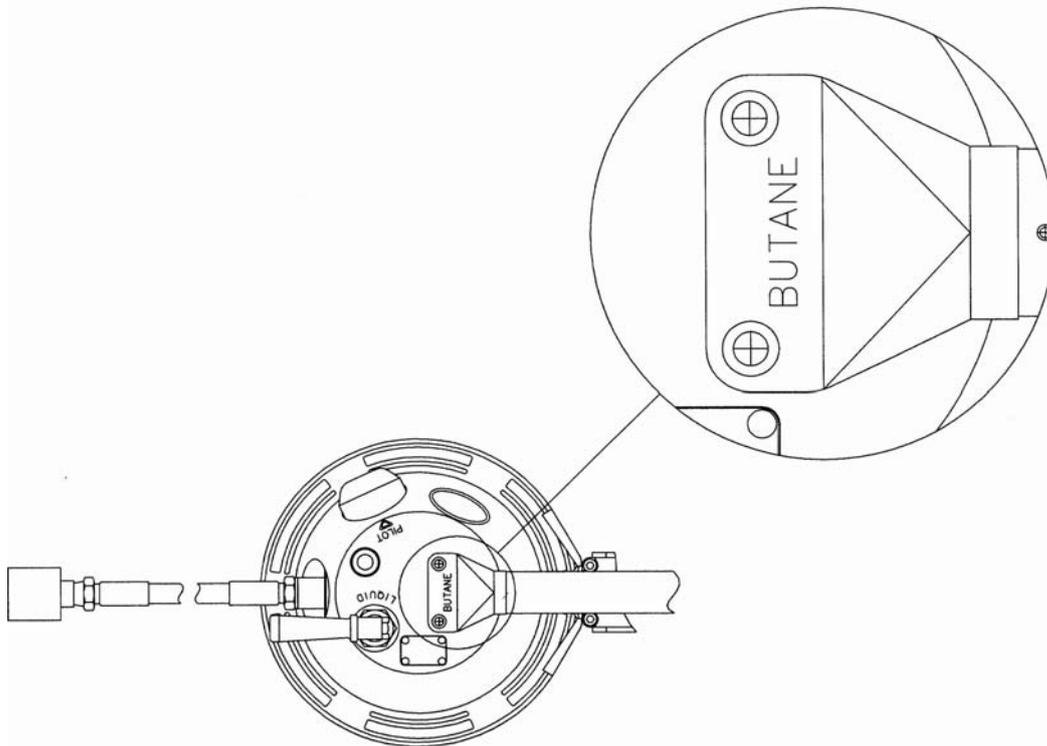



9.15.1.1 Controls and Control Functions

No change.

9.15.2 Operational Limitations

9.15.2.1 Use of Propane

When the burner is configured for use with butane fuel, propane fuel must not be used.

9.15.2.2 Cylinder Pressurisation

The fuel cylinders may only be pressurised by heating the cylinder with a suitable electrically powered jacket approved by Ultramagic or by injecting nitrogen gas. Only nitrogen gas may be used for this purpose.

When nitrogen pressurising fuel cylinders, do not exceed 20 bar pressure inside the cylinder.

Note that some earlier fuel cylinders are fitted with pressure relief valves set to open at 19 bar. In such cases, the cylinder pressure must not exceed 18 bar. If in doubt, contact Ultramagic.

When heating the fuel cylinders, it is recommended that the pressure does not exceed 12 bar as this can cause the butane inside the cylinder to expand and completely fill the vapour space (liquid lock) causing the internal pressure to increase rapidly. The precise pressure at which liquid lock occurs depends upon the condition of the butane fuel during re-fuelling and as such, the 12 bar limitation is only a guide. During cylinder heating, monitor the cylinder pressure to ensure that it does not exceed 12 bar.


9.15.2.3 Compatibility with MK21 Burner Electric Variant

Butane fuel must not be used with the MK21 optional fit, electrically operated main blast valve.

9.15.3 Emergency Procedures

No change.

9.15.4 Normal Procedures



The following procedures are additional to those already contained in the Flight Manual.

9.15.4.1 Preparation for Flight

Since the natural vapour pressure of butane is considerably less than for propane at similar temperatures, it may be necessary to pressurise the fuel cylinders in advance of the flight. This may be achieved by injecting nitrogen into the fuel cylinder or by heating the fuel cylinders using electrically powered heating jackets approved by Ultramagic.

9.15.4.2 Cylinder Heating

If cylinder heating is the preferred method of achieving cylinder pressurisation, then the cylinder should be heated prior to flight using a suitable, electrically powered heating jacket approved by Ultramagic. Note that electrically powered heating jackets draw significant electrical current. It is likely therefore that an electrical spark will be generated when connecting or disconnecting the jacket from the power supply. To eliminate the risk of explosion, make sure that cylinder heating is carried out in well ventilated areas away from fuel vapours.

After heating, the heating jacket must be removed and the cylinder must be fitted with the standard padded jacket. The padded jacket insulates the cylinder with the result that the pressure will be maintained for longer periods of time.


9.15.4.3 Nitrogen Pressurisation

When pressurising with nitrogen, the initial charged cylinder pressure rapidly decays as fuel is drawn from the cylinder. The decay characteristics are roughly in accordance with Boyle's Law, i.e. as the vapour space inside the cylinder doubles, the nitrogen pressure is halved. This reduction in cylinder pressure continues until the natural vapour pressure of the butane becomes the predominant factor.

When pressurising fuel cylinders with nitrogen gas, ensure the correct equipment is used. Check that the bottle contains only nitrogen. The use of different gasses can be very dangerous.

Note that cylinder pressures in excess of 8 bar will not significantly increase the burner output power but higher initial pressures will be required to ensure that the cylinder pressure remains within a useable range throughout the flight duration. To achieve this, it is recommended that the cylinder be pressurised to between 12 and 15 bar.

Although the burner is designed to operate at low pressure, charging the cylinder to a pressure less than the recommended levels will result in low final cylinder pressures with a corresponding loss of burner output power.



9.15.5 Loading

No change.

9.15.6 Balloon and Systems Description

No change.

9.15.7 Balloon Maintenance, Handling and Care

No change.

9.15.8 Other Manufacturers Equipment

No change.

**M
K
2
1
B
U
R
N
E
R
,
B
U
T
A
N
E
F
U
E
L**